


Viti a testa cilindrica con cava esagonale
Hexagonal socket head cap screws

simil
DIN7984

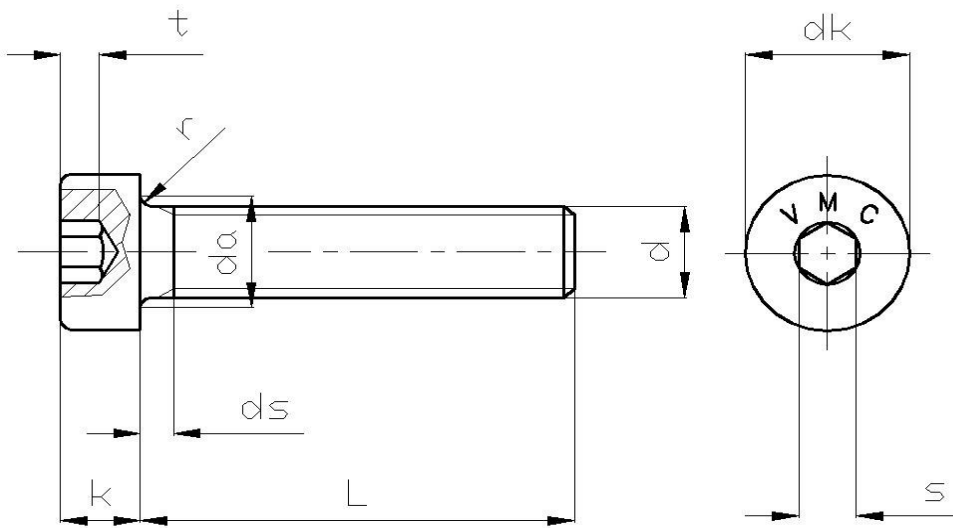

Diametro		M3	M4	M5	M6	M8	M10
P	passo	0,5	0,7	0,8	1	1,25	1,5
ds	max	1,5	2,1	2,4	3,0	3,75	4,5
da	max	3,6	4,7	5,7	6,8	9,2	11,2
dk	max	5,50	7,00	8,50	10,00	13,00	16,00
	min	5,32	6,78	8,28	9,78	12,73	15,73
k	max	2,00	2,80	3,50	4,00	5,00	6,00
	min	1,86	2,66	3,32	3,82	4,82	5,82
s	nom	2	2,5	3	4	5	7
	max	2,10	2,60	3,10	4,12	5,14	7,175
	min	2,02	2,52	3,02	4,02	5,02	7,025
t	max	1,50	2,10	2,60	2,80	3,80	4,65
	min	1,00	1,60	2,10	2,30	3,30	4,35