

-  **VITI TESTA CILINDRICA RIBASSATA CON CAVA ESAGONALE**
-  **HEXAGON SOCKET HEAD CAP SCREWS WITH LOW HEAD**
-  **ZYLINDERSCHRAUBEN MIT INNENSECHSKANT MIT NIEDRIGEM KOPF**

**SIMILAR
DIN 7984**


**SOLO VITI TUTTO FILETTO
ONLY FULLY THREADED SCREWS
NUR VOLLGEWINDESCHRAUBEN**



Materiali: Acciaio 08.8
010.9 | 012.9 | A2-70 su richiesta

Materials: Steel 08.8
010.9 | 012.9 | A2-70 on request

Werkstoffe: Stahl 08.8
010.9 | 012.9 | A2-70 auf Anfrage

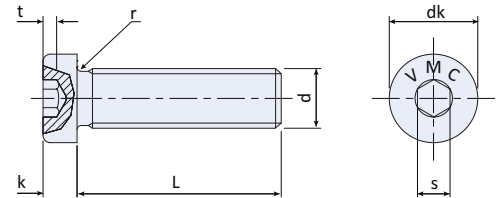

Ø		M5	M6	M8
P	passo/pitch/Steigung	0,80	1,0	1,25
r	min	0,20	0,25	0,40
	max	8,50	10,00	13,00
dk	min	8,28	9,78	12,73
	max	3,50	4,0	5,0
k	min	3,32	3,82	4,82
	CH	3	4	5
s	max	3,10	4,12	5,14
	max	2,60	2,80	3,80
t	min	2,10	2,30	3,30

Deviazione dalla norma / Deviation from the standard / Abweichung von der Norm

nom	min	max	peso / weight / Gewicht		
			M5	M6	M8
6	5,76	6,24			
8	7,71	8,29			
10	9,71	10,29	2,6	3,6	
12	11,65	12,35	2,8	3,9	
14	13,65	14,35	3,1	4,3	
16	15,65	16,35	3,3	4,7	9,4
18	17,65	18,35	3,6	5,0	10
20	19,58	20,42	3,8	5,3	10,7
22	21,58	22,42	4,1	5,7	11,4
25	24,58	25,42	4,5	6,2	12,4
28	27,58	28,42	4,9	7	13,3
30	29,58	30,42	5,1	7,4	14,2
35	34,50	35,50	5,8	8,3	15,8
40	39,50	40,50	6,4	9,2	17,4