

VITI TESTA CILINDRICA RIBASSATA CON CAVA ESAGONALE


Materiali: Acciaio 08.8
Su richiesta: 010.9 | 012.9

HEXAGON SOCKET HEAD CAP SCREWS WITH LOW HEAD

Materials: Steel 08.8
On request: 010.9 | 012.9

ZYLINDERSCHRAUBEN MIT INNENSECHSKANT MIT NIEDRIGEM KOPF

Werkstoffe: Stahl 08.8
Auf Anfrage: 010.9 | 012.9

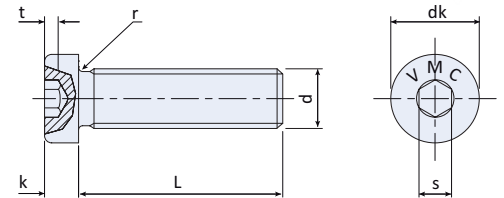

**SIMILAR
DIN 7984**

**SOLO VITI TUTTO FILETTO
ONLY FULLY THREADED SCREWS
NUR VOLLGEWINDESCHRAUBEN**

- Produzione su richiesta anche con cava esalobata.
- Hexalobular socket head also available on request.
- Produktion auf Anfrage auch innensechsrundkopf lieferbar.

Ø		M5	M6	M8
P	passo/pitch/Steigung	0,80	1,0	1,25
r	min	0,20	0,25	0,40
dk	max	8,50	10,00	13,00
	min	8,28	9,78	12,73
k	max	3,50	4,0	5,0
	min	3,32	3,82	4,82
s	CH	3	4	5
t	max	2,60	2,80	3,80
	min	2,10	2,30	3,30

Deviazione dalla norma / Deviation from the standard / Abweichung von der Norm

nom	min	max	peso / weight / Gewicht		
			M5	M6	M8
6	5,76	6,24			
8	7,71	8,29			
10	9,71	10,29	2,6	3,6	
12	11,65	12,35	2,8	3,9	
14	13,65	14,35	3,1	4,3	
16	15,65	16,35	3,3	4,7	9,4
18	17,65	18,35	3,6	5,0	10
20	19,58	20,42	3,8	5,3	10,7
22	21,58	22,42	4,1	5,7	11,4
25	24,58	25,42	4,5	6,2	12,4
28	27,58	28,42	4,9	7	13,3
30	29,58	30,42	5,1	7,4	14,2
35	34,50	35,50	5,8	8,3	15,8
40	39,50	40,50	6,4	9,2	17,4