

🇮🇹 VITI TESTA SVASATA PIANA CON CAVA ESALOBATA (6 LOBI)


Materiali: Acciaio 010.9
Su richiesta: 08.8 | 012.9 | A2-070

🇬🇧 HEXALOBULAR SOCKET COUNTERSUNK HEAD SCREWS (6 LOBE)

Materials: Steel 010.9
On request: 08.8 | 012.9 | A2-070

🇩🇪 SENKSCHRAUBEN MIT INNENSECHSRUND (I6R)

Werkstoffe: Stahl 010.9
Auf Anfrage: 08.8 | 012.9 | A2-070

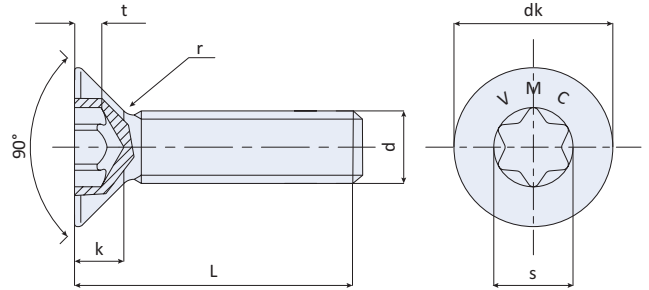

ISO 14581

SOLO VITI TUTTO FILETTO. VITI SENZA SPALLAMENTO
ONLY FULLY THREADED SCREWS. SCREWS WITHOUT SHOULDER
NUR VOLLGEWINDESCHRAUBEN. SCHRAUBEN OHNE ANSATZ

- Produzione su richiesta con requisiti MOQ. Possibile anche M4 e M12.
- Production on request with MOQ requirements. M4 and M12 also available.
- Produktion auf Anfrage mit MOQ-Vorgaben. M4 und M12 auch verfügbar.

Ø		M5	M6	M8	M10
P	passo/pitch/Steigung	0,80	1,0	1,25	1,50
r	min	1,30	1,50	2,0	2,50
	max	9,30	11,30	15,80	18,30
dk	min	8,94	10,87	15,37	17,78
	max	2,70	3,30	4,65	5,0
k	T	25	30	45	50
s	rif	4,50	5,60	7,95	8,95
	max	1,51	1,78	2,54	2,80
t	min	1,12	1,39	2,15	2,41

nom	min	max	peso / weight / Gewicht			
			M5	M6	M8	M10
6	5,76	6,24				
8	7,71	8,29	1,59	2,29		
10	9,71	10,29	1,85	2,66		
12	11,65	12,35	2,1	3,02	6,41	
14	13,65	14,35	2,36	3,39	7,06	
16	15,65	16,35	2,61	3,75	7,72	12,1
18	17,65	18,35	2,86	4,11	8,38	13,14
20	19,58	20,42	3,12	4,48	9,04	14,18
22	21,58	22,42	3,37	4,84	9,7	15,21
25	24,58	25,42	3,75	5,39	10,68	16,77
28	27,58	28,42	4,13	5,93	11,67	18,33
30	29,58	30,42	4,39	6,30	12,33	19,37
35	34,50	35,50	5,02	7,21	13,97	21,97
40	39,50	40,50	5,66	8,11	15,62	24,57
45	44,50	45,50	6,29	9,02	17,27	27,17
50	49,50	50,50	6,93	9,93	18,91	29,77
55	54,40	55,60	7,57	10,84	20,56	32,37
60	59,40	60,60	8,2	11,75	22,2	34,97
65	64,40	65,60		12,66	23,85	37,56
70	69,40	70,60		13,57	25,49	40,16